






TI-2200

TI-2200A

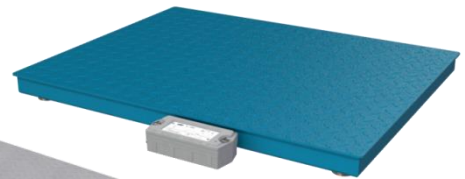


## FEATURE

- ◆ Wireless Communication by using ZigBee
- ◆ Water Proof : IP-66
- ◆ Easy to exchange battery pack
- ◆ Interface with Wireless Remote Display and Controller
- ◆ Enable to charge : AC Adapter/Battery Charger Include

MODEL	TI-2200	TI-2200A
Case material	Engineering Plastic	
Non linearity	0.01% F.S.	
A/D conversion method	Sigma delta	
A/D internal resolution	1/200,000	
A/D external resolution	1/10,000 (max.)	
Zero adj. range	0.05mV~5mV	
Input sensitivity	1uV/D	
Load Cell Excitation Voltage	DC 3V, 300mA (up to 8 load cell)	
Frequency	2400 ~ 2483.5MHz	
RF Output power	Max. 4dBm	
Radio Link Effective Range	100m(Open Space)	
Charge adaptor	DC 5V, 1A	
Battery pack	Lithium Polymer Battery, Charger Input Include	
Temperature range	-10℃ ~ 40℃	
Display lamp	Low Battery (Green), Power On (Red)	
Battery life	Max 90hr(1 loadcell)	Max 80hr(1 loadcell)
Display	N/A	0.9"OLED
Keypads	Power & Zero (1key)	Power , Zero , Function (3key)

# How to enjoy wireless communication with various products


ex-1

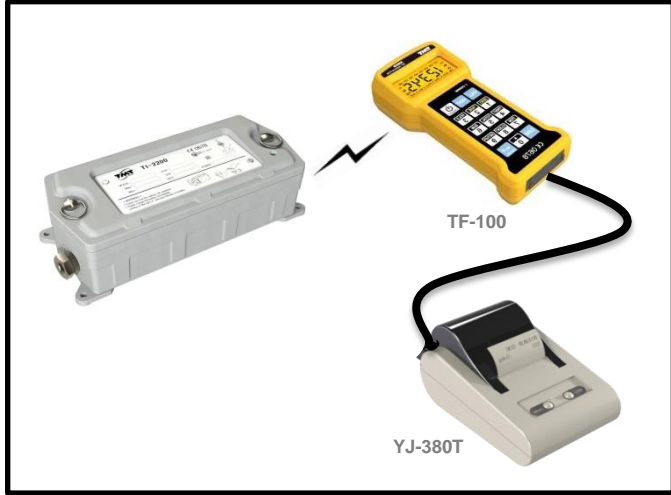

ex-2




ex-3

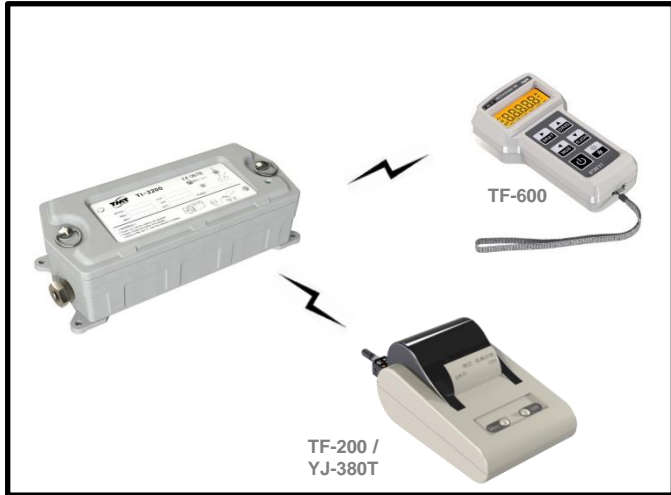

ex-4



ex-5

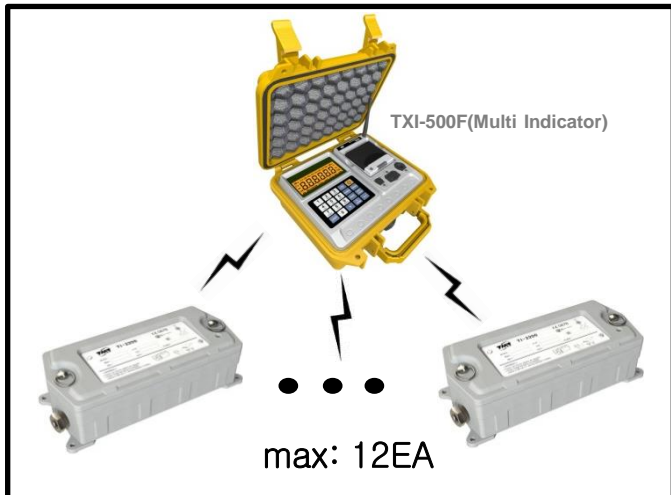

ex-6

